


Optical YS Converter N1/C1/C2/CR/S1/S2 Compatibility Chart

Camera	Housing	Optical YS Converter			Strobes																	
		Model [Model Number]	Serial Number	Setting	YS-D3 DUO	YS-D3 MarkII	YS-D3	YS-D2 (Yellow/D1) Serial No. 1709 ~	YS-D2 (Black/Orange) Serial No. Y502 ~	YS-D1	YS-03 /SOLIS	YS-01 /SOLIS	YS-110α									
Nikon	D810	MDX-D810	Optical YS Converter/N1 for MDX [50126]	124000001~0273	-	Y ※11 D2/D3 mode	Y ※11 D2/D3II mode	Y ※12	Y-1EV ※1, ※10	Y ※1	Y	N	Y	Y								
		124000274~		Blue	Y				Y													
	D7200/D7100	MDX-D7100		124000001~0273	-				Y-2EV ※1, ※10	Y-1.5EV ※1, ※10												
		124000274~		Green	Y				Y+0.3EV ※10													
	D500	MDX-D500		124000001~0273 ※2	-				Y-0.7EV ※10	Y												
		124000274~		Blue	Y				Y+0.7EV ※10													
D850	MDX-D850																					
Z7/Z6	MDX-Z7/Z6		124000274~ ※9	Blue				Y	Y+1EV ※10													
Canon	EOS 70D	MDX-70D	Optical YS Converter/C1 for MDX [50136]	134100267~ ※3	Green	Y ※11 D2/D3 mode	Y ※11 D2/D3II mode	Y ※12			Y	N	Y	Y								
	EOS 5D markIII	MDX-5D markIII ver.2			Blue				Y	Y	Y	N	Y	Y								
	EOS 80D ※5	MDX-80D			Blue				Y+1EV	Y+1EV	Y+1EV	N	Y+1.5EV	Y+1.5EV								
	EOS 7D markII	MDX-7D markII ver.2	Optical YS Converter/C2 for MDX [50142]	YSC200094~ ※4	Green				Y	Y	Y	N	Y	Y								
	EOS 5Ds	MDX-5D markIII ver.2			Green				Y	Y	Y	N	Y	Y								
	EOS 5DsR				Green				Y	Y	Y	N	Y	Y								
	EOS 5D markIV ※7	MDX-5D markIV			Blue																	
	EOS 100D	RDX-100D	Optical YS Converter/C1 for RDX [50137]	-	-							Y	Y ※1	Y	N	Y	Y					
	EOS R	MDX-R	Optical YS Converter/CR for MDX [50143]	-	-				Y	Y	Y	Y	Y	Y	N	N	N					
	EOS R5	MDX-R5							D1 mode													
EOS R5II	MDX-R5II																					
Sony	α7II	MDX-α7II	Optical YS Converter/S1 for MDX [50139]	-	-	Y ※11 D2/D3II mode	Y ※11 D2 mode(S1) D3II mode(S2)	Y ※13	Y-0.3EV ※10	Y	Y	Y	Y	N								
	α7RII																					
	α7SII	MDX-α7III	Optical YS Converter/S2 for MDX [50151] ※6	-	-																	
	α7RIII/α7RIII																					
	α7RV/α7RIV/α7IV α7SIII/α9II/α1														MDX-αU							

- ※1 Set the Strobe Selector Switch to the (YS) D1 position.
- ※2 Optical YS Converter/N1 with serial numbers below 124000232 are not compatible. New firmware will be required. Contact the official SEA&SEA distributor or an official SEA&SEA dealer near you.
- ※3 Optical YS Converter/C1 with serial numbers below 134100267 are not compatible. New firmware will be required. Contact the official SEA&SEA distributor or an official SEA&SEA dealer near you.
- ※4 Optical YS Converter/C2 with serial numbers below YSC200094 are not compatible. New firmware will be required. Contact the official SEA&SEA distributor or an official SEA&SEA dealer near you.

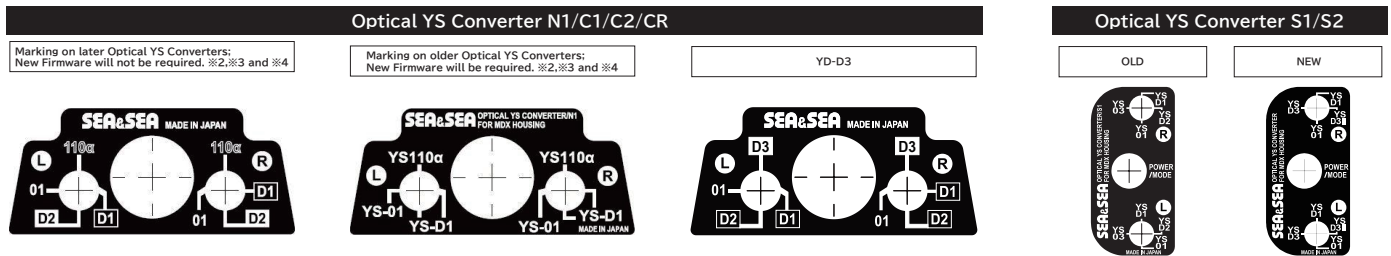

- ※5 When used with the MDX-80D, adjust the camera's exposure compensation in accordance with the above chart. See the camera's instruction's for details.
- ※6 This Converter requires special installation. Please contact your local SEA&SEA service center for further details. SONY's own shoe adapter "ADP-MAA" is required to connect the camera and the Optical YS Converter/S1.
- ※7 When shooting macro, images may be overexposed. In this case, increase the distance from housing to the photo subject or use manual mode.
- ※8 Set the custom mode to A (default setting).
- ※9 When used with Optical YS Converters with serial numbers below 124000232, modification of the converter and new firmware will be required. When used with Optical YS Converters with serial number between 124000232 and 124000273, new firmware will be required. Contact the official SEA&SEA distributor or an official SEA&SEA dealer near you.
- ※10 Adjust the camera's exposure compensation in accordance with the above chart to get correct exposure.
- ※11 Set the strobe selection switch to "D2". If there is an indication for D3II compatibility, please use it in accordance with "D3II".
- ※12 Use a product with a sticker indicating D3 compatibility and set the strobe selection switch to "D3". If "D3" is not displayed, the firmware needs to be rewritten. Contact the official SEA&SEA distributor or an official SEA&SEA dealer near you.
- ※13 Set the strobe switch to "03". If there is an indication for D3 compatibility, please use it according to "D3".

Attention

- Fiber-Optic Cable II are required when using Optical YS Converters.
- Fiber-Optic Cable L-Type(discontinued) are not compatible with Optical YS Converters.
- TTL exposure is adjusted to the standard 18% gray. Exposure compensation may be required, depending on shooting condition. Adjust exposure using the strobe's or the camera's exposure compensation function, when necessary.