
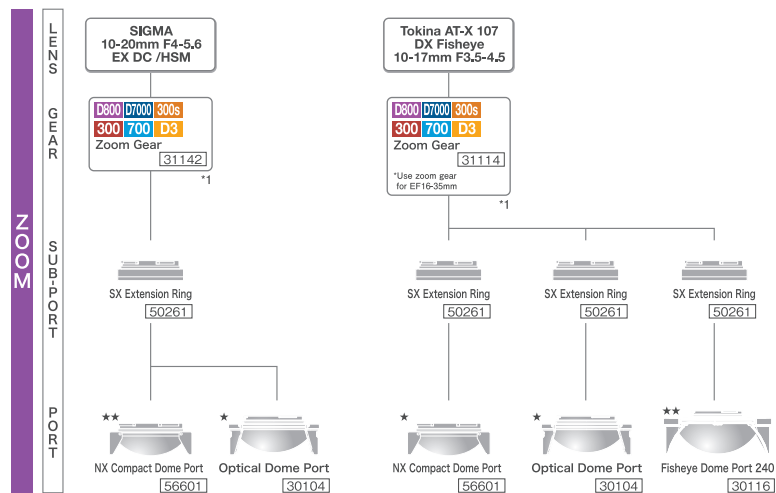


System Chart for MDX Housings (for Nikon)

MDX-D800, MDX-D7000, MDX-D300s, MDX-D300, MDX-PRO D700, MDX-PRO D3

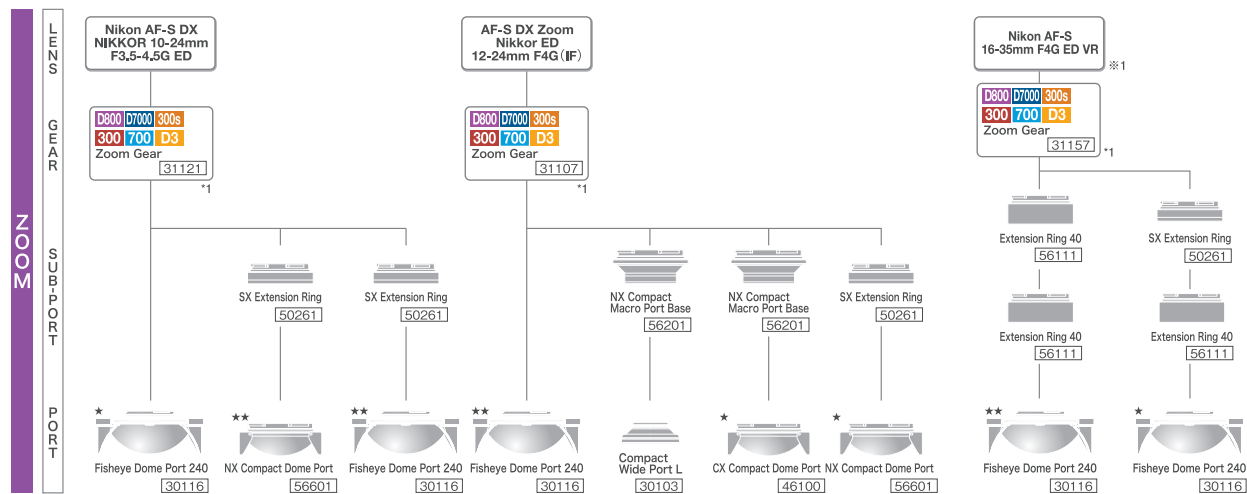

★★ : Image aberration is rarely apparent ★ : Image aberration is sometimes apparent

☆ : The Close-up Lens 125 can be attached to the port end. *The M67-M62 Step Down Ring is required when mounting the Close-up Lens 125.

*1: Manual focus cannot be used. *2: Auto focus cannot be used. *3: It may be necessary to remove the dome shades at the widest picture angle so they do not appear in the images.

*4: When mounting the Optical Dome Port on the MDX-D800 without any extension ring(s) remove the both shades by loosening the hex screws.

※1 Setting of the aperture value more than F8 is recommended.

[Notice] Unnecessary reflection may be photographed under some conditions.

[Notice] The system chart indicates the most recent information as of December 2012. Please refer to the current system chart on our website at the following address: <http://www.seandsea.jp/>.

Housings with the following marks are compatible

D800 MDX-D800 D7000 MDX-D7000 300s MDX-D300s 300 MDX-D300 700 MDX-PRO D700 D3 MDX-PRO D3