


A housing for high-quality but reasonably priced digital SLR camera.



| | |
|--------------------|--------------------------------------|
| Construction | Polycarbonate |
| Depth rating | 60m / 200ft |
| Dimensions (WxHxD) | 200x190x139.5mm / 8x7.6x5.6inch |
| Weight | Approx. 2,000g / 70oz (Housing only) |

*Grip and port are sold separately.

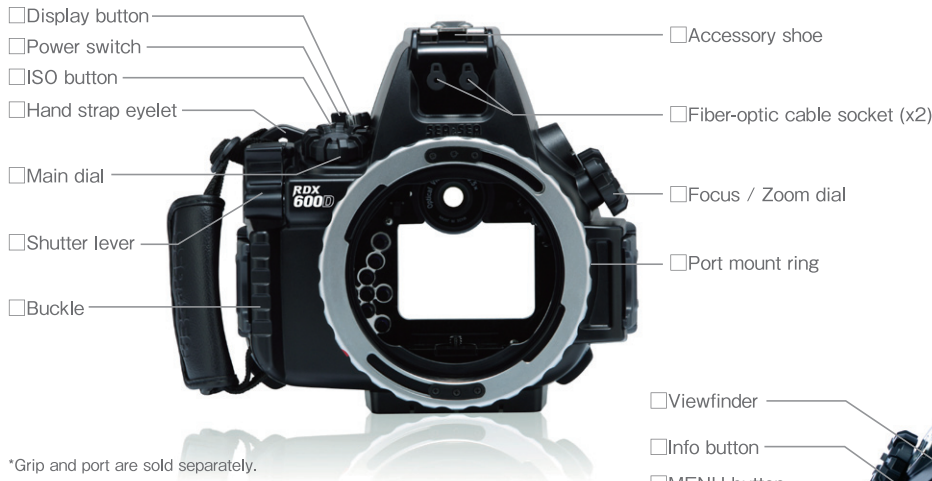

U/W Housing for Canon EOS 600D / Rebel T3i

RDX-600D

■ RDX-600D [Product No. 06158](#)

■ RDX-600D Housing and Standard Port Set [Product No. 06640](#)

Easy mounting

Camera Quick Shoe for easy mounting and removal of the camera. Mounting the camera becomes a breeze. You need only to slide the camera quick shoe into the slot, up to the designated position. There is almost no need for complicated position and gear alignments so even beginners can easily mount a camera.



Two Fiber-optic cable sockets

Simply by connecting the Fiber-optic cable (L-type) to the connector, the light of the digital camera's built-in flash is detected and connected to an external strobe. This is considerably less complicated than setting up an electrical connector that requires detailed knowledge. It also eliminates any risks involved when the connector is submerged in water.



When using a YS Converter/C to enable the TTL auto adjustment, use a Sync Cord/N to connect it to a genuine SEA&SEA strobe.
*Optional YS Converter/C 6 pin Connector is required.

Customer-replaceable strobe connector (Optional Sync Cord 2 pin connector) is available. Remove the accessory connector cap and install the Optional Sync Cord / N. Then the 5-pin Sync Cord/N or the 5-pin Dual Sync Cord/N will be useable.

Features a Optical Viewfinder 0.5x that makes it easy to see the whole field of view. An optional exchangeable viewfinder can be selected as well.

Various ports including NX ports can be mounted with the RDX Port Base L or the RDX Port Base S in order to accommodate many kinds of lenses.

New type of easily operated shutter lever, excellent for quick snapshots. The shutter lever can be operated in two ways – pushing from the top or pulling from the front – and offers a smooth halfway press for adjusting the autofocus so you need not worry about any missed chances.

Accessories

Grip-Stay L II

[Product No. 22128](#)

Grips and base stay with adjustable horizontal width and angle. The Sea Arm 8 or a New Housing Lanyard can be attached to the grips.



YS Converter/C

[Product No. 50118](#)

This converter can be used to attach an external strobe to Canon digital SLR camera housings and allows for TTL adjustment.



Fiber-Optic Cable (L-type)

[Product No. 50107](#)

This fiber-optic cable resists bending and has improved light-conducting efficiency.



5-pin Sync Cord/N

[Product No. 17100](#)

